


UNDER FLOOR/GROUND Bio-Hydro Mechanical INTERCEPTOR

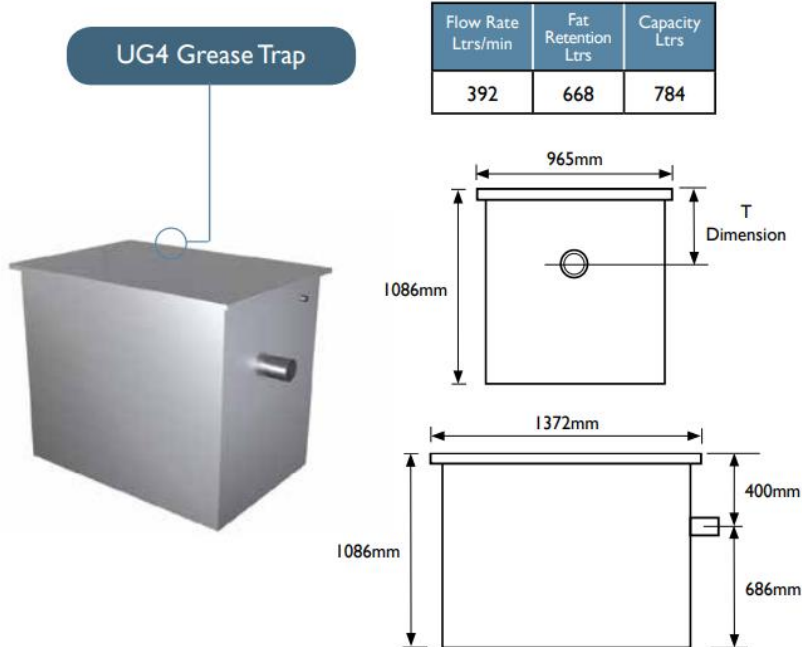

When used under floor cover is set to suit floor finish inlet/outlet to suit drainage under slab, a support arrangement can be fitted using threaded bar & M/S angle.

When used in stable ground base and filling can be sand & gravel [engineer to specify] Water table must be considered!

Interceptors should be fitted as close to surface as is possible. Kitchen waste only should enter trap!

The C-Dimension / Invert should be calculated before ordering / production this ensures that at finished ground, cover & pipe system are in correct positions

The location of interceptors should allow access for cleaning!

The covers can be inverted to accept block / tile or Alu-Durbar finish. Light lorry or car traffic is standard, Inlets 110mm standard [ if specified any size can be accommodated]

Retrofitting cover access to traps can be awkward & expensive! Correct sizing before manufacture is important to maximise ease of install!

## Contacts

E-mail: [enquiry@alulinegroup.com](mailto:enquiry@alulinegroup.com)

Website: [Welcome To Aluline Ltd : Aluline Ltd \(alulinegms.com\)](http://Welcome To Aluline Ltd : Aluline Ltd (alulinegms.com))

Num: 0044(0)1928563532



This is copyright & design protected